

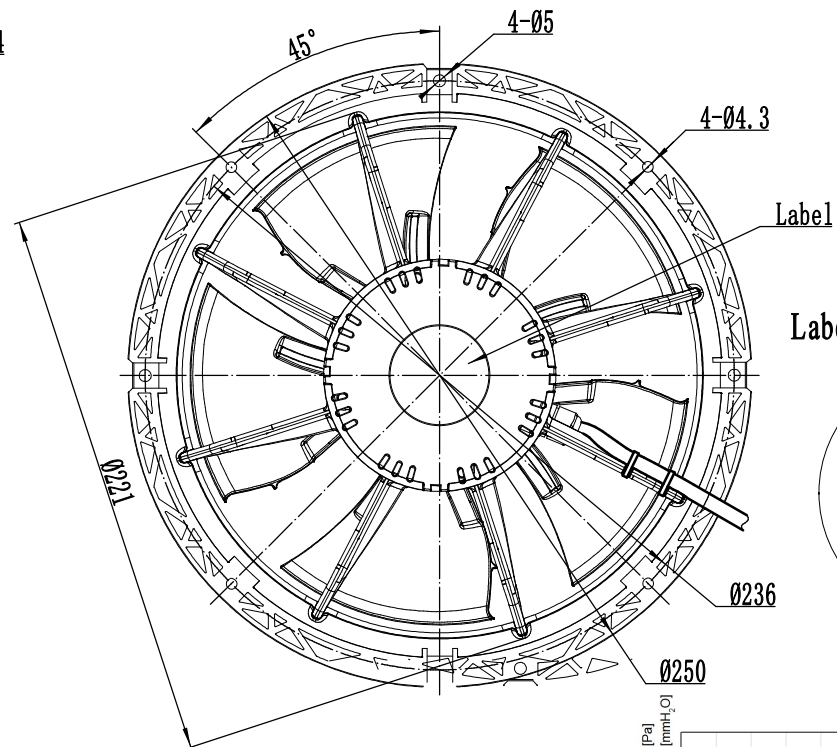


E0298P1



Type	Rated voltage(V)	Frequency(Hz)	Input current(A)	Input power(W)	Rated speed(r/min)	Max Air flow(m³/h)	Noise(dBA)	Perm.amb.temp(℃)
EC072/13E3G01-AS200/52P1-01	230VAC	50/60	0.25	28±10%	2100/1500	850±10% ^① 2100	≤62	-30~+50

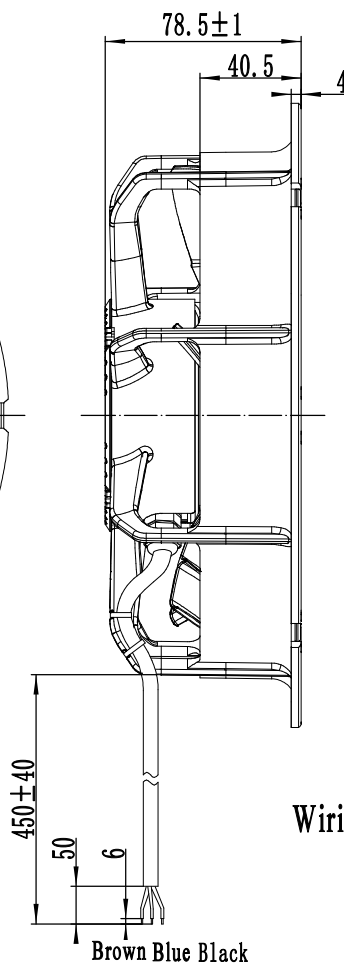

Label:

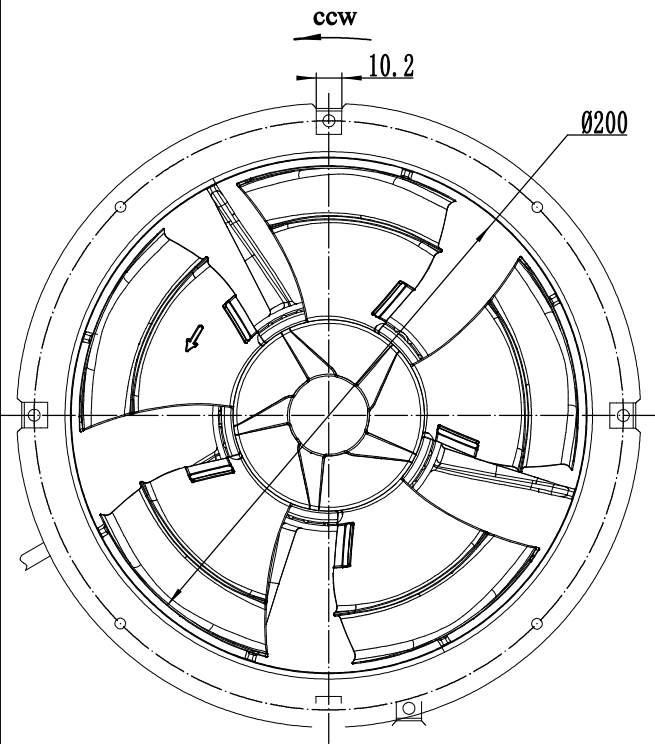

Wiring diagram:

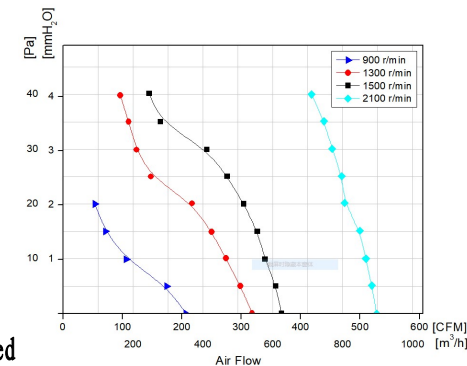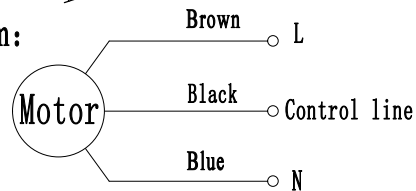

Technical requirements:

- 1.Fan flexible rotation, no clamping stagnation, abnormal sound and other bad phenomenon;
- 2.No oil and glue mark on the surface of the fan, no defects such as obvious deformation, mechanical mar,etc;
- 3.Lead wires surface without damage, the length according to the requirements of the drawings;
- 4.The motor is BLDC , it's protection functions include blocking protection,soft start, current-limiting protection ;
- 5.Rotation direction: The fan rotates ccw viewed from rotor;
6. 2 speeds programmed through NFC;
- 7.Main technical parameters of the fan according to the preceding table:

Black line open: n1 speed

Black line connecte with blue line or brown line: n2 speed

												Hangzhou Weiguang Electronic CO.,LTD.					
												ECM+ energy-saving fan					
Mark	Number	Partition	Change the file number	Signature	Date	Phase marker			Weight	Proportion	EC072/13E3G01-AS200/52P1-01						
Design			Standardization														
										1:1							
Examine											E0298P1						
Technology			Approval			Total	1	piece	Article	1							piece